

 PLAYLED



ULTRA

The ECO-FRIENDLY Weatherproof LED Luminaire.

U L T R A

The ECO-FRIENDLY Weatherproof LED Luminaire.

PLAYLED, the leading Italian brand in the lighting industry, is proud to present **ULTRA**, the new weatherproof LED luminaire made in Italy. It is designed to offer excellent and long-lasting performance in any environment, with easy access to its components for comprehensive maintenance.



60 cm

120 cm

150 cm

Design and dimensions

The ULTRA luminaire is available in **three different sizes** to suit every space and need:

60 cm: Compact and versatile, ideal for small spaces.

120 cm: Perfect for medium spaces, a balance between size and power.

150 cm: Maximum light coverage for large spaces, ensuring uniformity and clarity.





M A D E I N I T A L Y

High-quality materials



Made from high-strength **polycarbonate**, ULTRA is designed to last over time and withstand impacts and the harshest environmental conditions. This **innovative material** ensures a **long service life and minimal maintenance**, making ULTRA the ideal choice for industrial, commercial, and residential environments.






Product Plus



Water and Dust Resistance

Thanks to its sealed construction and IP66 protection rating, ULTRA provides exceptional protection against water and dust. It is perfect for humid and dusty environments.



Four types of products

are available linear version, single wiring, through wiring, and emergency, to suit any lighting need.




High-impact polycarbonate body

Designed to withstand impacts and the most challenging environmental conditions.



Made in Italy Production

All the quality and innovation of Italian design and manufacturing, ensuring a product of excellence.

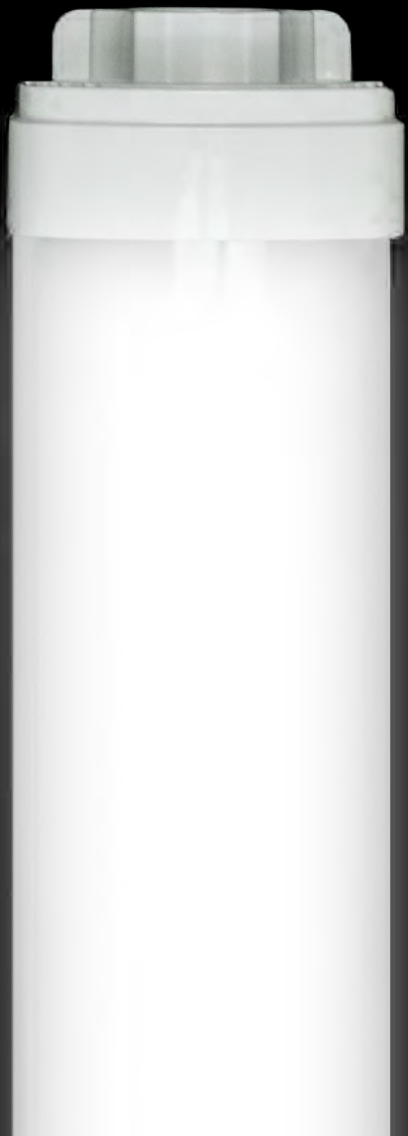


Energy Efficiency

Equipped with the latest LED technology, ULTRA ensures powerful, energy-efficient lighting, helping to reduce operational costs and environmental impact.



Long Duration and Reliability

With a lifespan exceeding 50,000 hours, ULTRA represents a safe and lasting investment for lighting any space.



Easy Maintenance and Renewability

Thanks to access openings for maintenance, it is possible to replace the LED source or the power supply at any time, making ULTRA a completely renewable product. This not only extends the product's useful life but also represents a significant advantage in terms of environmental sustainability and cost savings.



Product Feature

Power

From 19W to 65W

Lumen

From 2868 lm to 10405 lm

CCT

3000K, 4000K, 6500K



Possibility of continuous row installation



Easy maintenance and installation

Tool-free opening cap with quick-release mechanism for replacing the power supply and LED board in case of maintenance.



Electrical connection box with a bayonet-type opening that requires no tools and quick-connect terminals.






ULTRA

The ULTRA weatherproof LED luminaire, made in Italy, is designed to deliver excellent and long-lasting performance in any indoor or outdoor environment, with easy access to its components for complete maintenance.

GENERAL FEATURES	
PROTECTION DEGREE	IP66
IK	09
WEIGHT	600-1000-1350 GR
DIMENSIONS	600-1200-1500 X70X64 CM
LIGHTING FEATURES	
LED TYPE	2835
CHROME YIELD	SDCM <3
RG	0
FLOW MAINTENANCE	90% 80000H (L90B10)
LUMINOUS FLUX TOLERANCE	=+/- 7%
ELECTRICAL FEATURES	
WATT	19W - 37W - 51W - 71W
CONSUMPTION TOLERANCE	=+/- 7%
LIGHT SOURCES	108 - 228 - 300


POWER SUPPLY	230V
DIMMABLE	DO NOT
POWER FACTOR	0,9
MAINTENANCE INDEX	95
MATERIAL FINISHES	
BODY	EXTRUDED POLYCARBONATE
CABLE	NYLON
FINISH	RAL9003
SCREEN	OPAL POLYCARBONATE DIFFUSER
TEMPERATURES	
STORAGE	FROM -35°C TO +80°C
OPERATION	FROM -35°C TO +50°C
RELIABILITY	UP TO 7-YEARS WARRANTY
RECYCLABILITY	95%

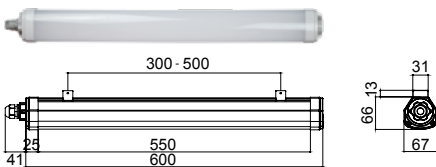

CONSUMPTION	POWER SUPPLY
19W	230V

AVAILABLE PRODUCTS / 60CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL60019TC	3000K	130°	3881 LM	2868 LM	STAGNA ULTRA 60CM 19W IP66 2868LM 3K
STUL60019TN	4000K	130°	4096 LM	3019 LM	STAGNA ULTRA 60CM 19W IP66 3019LM 4K
STUL60019TF	6500K	130°	4225 LM	3140 LM	STAGNA ULTRA 60CM 19W IP66 3140LM 6K

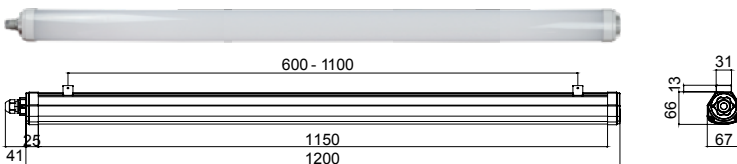

CONSUMPTION	POWER SUPPLY
37W	230V

AVAILABLE PRODUCTS / 120CM

CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL120037TC	3000K	130°	7194 LM	5399 LM	STAGNA ULTRA 120CM 37W IP66 5399LM 3K
STUL120037TN	4000K	130°	7573 LM	5683 LM	STAGNA ULTRA 120CM 37W IP66 5683LM 4K
STUL120037TF	6500K	130°	7952 LM	5967 LM	STAGNA ULTRA 120CM 37W IP66 5967LM 6K

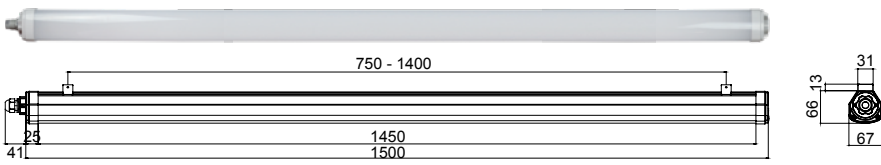

CONSUMPTION	POWER SUPPLY
51W	65W
	230V

AVAILABLE PRODUCTS / 150CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL150051TC	3000K	130°	9670 LM	7386 LM	STAGNA ULTRA 150CM 51W IP66 7386LM 3K
STUL150051TN	4000K	130°	10179 LM	7775 LM	STAGNA ULTRA 150CM 51W IP66 7775LM 4K
STUL150051TF	6500K	130°	10688 LM	8164 LM	STAGNA ULTRA 150CM 51W IP66 8164LM 6K
STUL150071TC	3000K	130°	11281 LM	9413 LM	STAGNA ULTRA 150CM 71W IP66 9413LM 3K
STUL150071TN	4000K	130°	11875 LM	9909 LM	STAGNA ULTRA 150CM 71W IP66 9909LM 4K
STUL150071TF	6500K	130°	12468 LM	10405 LM	STAGNA ULTRA 150CM 71W IP66 10405LM 6K

ULTRA DALI

The ULTRA weatherproof LED luminaire, made in Italy, is designed to deliver excellent and long-lasting performance in any indoor or outdoor environment, with easy access to its components for complete maintenance.

GENERAL FEATURES	
PROTECTION DEGREE	IP66
IK	09
WEIGHT	600-1000-1350 GR
DIMENSIONS	600-1200-1500 X70X64 CM
LIGHTING FEATURES	
LED TYPE	2835
CHROME YIELD	SDCM <3
RG	0
FLOW MAINTENANCE	90% 80000H (L90B10)
LUMINOUS FLUX TOLERANCE	=+/- 7%
ELECTRICAL FEATURES	
WATT	19W - 37W - 51W
CONSUMPTION TOLERANCE	=+/- 7%
LIGHT SOURCES	108 - 228 - 300
POWER SUPPLY	230V


DIMMABLE	DALI
POWER FACTOR	0,9
MAINTENANCE INDEX	95
MATERIAL FINISHES	
BODY	EXTRUDED POLYCARBONATE
CABLE	NYLON
FINISH	RAL9003
SCREEN	OPAL POLYCARBONATE DIFFUSER
TEMPERATURES	
STORAGE	FROM -35°C TO +80°C
OPERATION	FROM -35°C TO +50°C
RELIABILITY	UP TO 7-YEARS WARRANTY
RECYCLABILITY	95%
CUSTOMIZATION	CODE COMPOSITION
DALI DIMMABLE + EMERGENCY	ITEM CDE + E

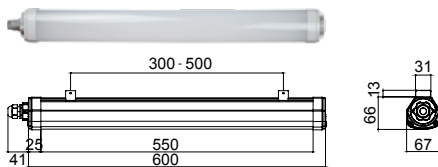

CONSUMPTION	POWER SUPPLY
19W	230V

AVAILABLE PRODUCTS / 60CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL60019TCD	3000K	130°	3881 LM	2868 LM	STAGNA ULTRA 60CM 19W IP66 2868LM 3K DALI
STUL60019TND	4000K	130°	4096 LM	3019 LM	STAGNA ULTRA 60CM 19W IP66 3019LM 4K DALI
STUL60019TFD	6500K	130°	4225 LM	3140 LM	STAGNA ULTRA 60CM 19W IP66 3140LM 6K DALI

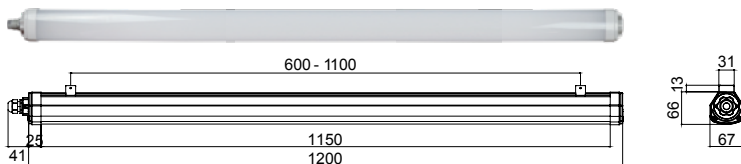

CONSUMPTION	POWER SUPPLY
37W	230V

AVAILABLE PRODUCTS / 120CM

CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL120037TCD	3000K	130°	7194 LM	5399 LM	STAGNA ULTRA 120CM 37W IP66 5399LM 3K DALI
STUL120037TND	4000K	130°	7573 LM	5683 LM	STAGNA ULTRA 120CM 37W IP66 5683LM 4K DALI
STUL120037TFD	6500K	130°	7952 LM	5967 LM	STAGNA ULTRA 120CM 37W IP66 5967LM 6K DALI

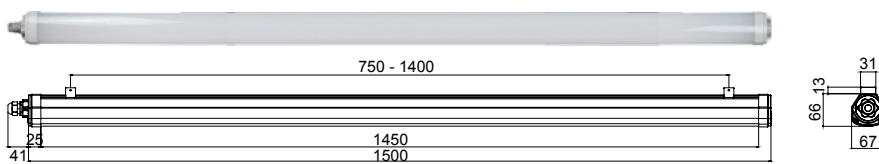

CONSUMPTION	POWER SUPPLY
51W	230V

AVAILABLE PRODUCTS / 150CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL150051TCD	3000K	130°	9670 LM	7386 LM	STAGNA ULTRA 150CM 51W IP66 7386LM 3K DALI
STUL150051TND	4000K	130°	10179 LM	7775 LM	STAGNA ULTRA 150CM 51W IP66 7775LM 4K DALI
STUL150051TFD	6500K	130°	10688 LM	8164 LM	STAGNA ULTRA 150CM 51W IP66 8164LM 6K DALI

ULTRA EMERGENZA

The ULTRA weatherproof LED luminaire, made in Italy, is designed to deliver excellent and long-lasting performance in any indoor or outdoor environment, with easy access to its components for complete maintenance.

GENERAL FEATURES	
PROTECTION DEGREE	IP66
IK	09
WEIGHT	600-1000-1350 GR
DIMENSIONS	600-1200-1500 X70X64 CM
LIGHTING FEATURES	
LED TYPE	2835
CHROME YIELD	SDCM <3
RG	0
FLOW MAINTENANCE	90% 80000H (L90B10)
LUMINOUS FLUX TOLERANCE	=+/- 7%
ELECTRICAL FEATURES	
WATT	19W - 37W - 51W - 71W
CONSUMPTION TOLERANCE	=+/- 7%
LIGHT SOURCES	108 - 228 - 300


POWER SUPPLY	230V
DIMMABLE	DO NOT
POWER FACTOR	0,9
MAINTENANCE INDEX	95
MATERIAL FINISHES	
BODY	EXTRUDED POLYCARBONATE
CABLE	NYLON
FINISH	RAL9003
SCREEN	OPAL POLYCARBONATE DIFFUSER
TEMPERATURES	
STORAGE	FROM -35°C TO +80°C
OPERATION	FROM -35°C TO +50°C
RELIABILITY	UP TO 7-YEARS WARRANTY
RECYCLABILITY	95%

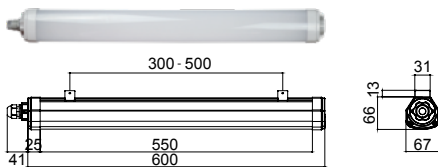

CONSUMPTION	POWER SUPPLY
19W	230V

AVAILABLE PRODUCTS / 60CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL60019TCE	3000K	130°	3881 LM	2868 LM	STAGNA ULTRA 60CM 19W IP66 2868LM 3K EMERG.
STUL60019TFE	4000K	130°	4096 LM	3019 LM	STAGNA ULTRA 60CM 19W IP66 3019LM 4K EMERG.
STUL60019TNE	6500K	130°	4225 LM	3140 LM	STAGNA ULTRA 60CM 19W IP66 3140LM 6K EMERG.

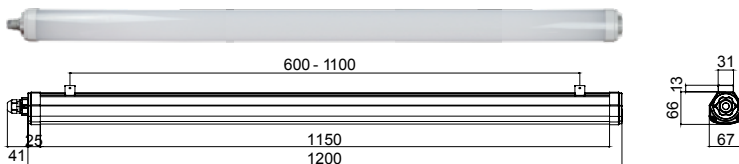

CONSUMPTION	POWER SUPPLY
37W	230V

AVAILABLE PRODUCTS / 120CM

CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL120037TCE	3000K	130°	7194 LM	5399 LM	STAGNA ULTRA 120CM 37W IP66 5399LM 3K EMER.
STUL120037TNE	4000K	130°	7573 LM	5683 LM	STAGNA ULTRA 120CM 37W IP66 5683LM 4K EMER.
STUL120037TFE	6500K	130°	7952 LM	5967 LM	STAGNA ULTRA 120CM 37W IP66 5967LM 6K EMER.

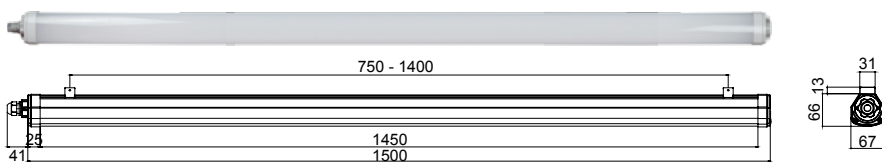

CONSUMPTION	POWER SUPPLY
51W	230V
65W	

AVAILABLE PRODUCTS / 150CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL150051TCE	3000K	130°	9670 LM	7386 LM	STAGNA ULTRA 150CM 51W IP66 7386LM 3K EMER.
STUL150051TNE	4000K	130°	10179 LM	7775 LM	STAGNA ULTRA 150CM 51W IP66 7775LM 4K EMER.
STUL150051TFE	6500K	130°	10688 LM	8164 LM	STAGNA ULTRA 150CM 51W IP66 8164LM 6K EMER.
STUL150071TCE	3000K	130°	11281 LM	9413 LM	STAGNA ULTRA 150CM 71W IP66 9413LM 3K EMER.
STUL150071TNE	4000K	130°	11875 LM	9909 LM	STAGNA ULTRA 150CM 71W IP66 9909LM 4K EMER.
STUL150071TFE	6500K	130°	12468 LM	10405 LM	STAGNA ULTRA 150CM 71W IP66 10405LM 6K EMER.

ULTRA CP

The ULTRA weatherproof LED luminaire, made in Italy, is designed to deliver excellent and long-lasting performance in any indoor or outdoor environment, with easy access to its components for complete maintenance.

GENERAL FEATURES	
PROTECTION DEGREE	IP66
IK	09
WEIGHT	600-1000-1350 GR
DIMENSIONS	600-1200-1500 X70X64 CM
LIGHTING FEATURES	
LED TYPE	2835
CHROME YIELD	SDCM <3
RG	0
FLOW MAINTENANCE	90% 80000H (L90B10)
LUMINOUS FLUX TOLERANCE	=+/- 7%
ELECTRICAL FEATURES	
WATT	19W - 37W - 51W - 71W
CONSUMPTION TOLERANCE	=+/- 7%
LIGHT SOURCES	108 - 228 - 300


POWER SUPPLY	230V
DIMMABLE	DO NOT
POWER FACTOR	0,9
MAINTENANCE INDEX	95
MATERIAL FINISHES	
BODY	EXTRUDED POLYCARBONATE
CABLE	NYLON
FINISH	RAL9003
SCREEN	OPAL POLYCARBONATE DIFFUSER
TEMPERATURES	
STORAGE	FROM -35°C TO +80°C
OPERATION	FROM -35°C TO +50°C
RELIABILITY	UP TO 7-YEARS WARRANTY
RECYCLABILITY	95%

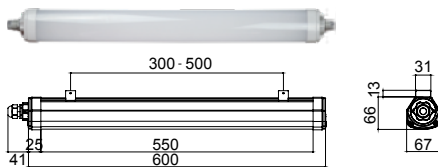

CONSUMPTION	POWER SUPPLY
19W	230V

AVAILABLE PRODUCTS / 60CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL60019XC	3000K	130°	3881 LM	2868 LM	STAGNA ULTRA 60CM 19W IP66 2868LM 3K SER.
STUL60019XN	4000K	130°	4096 LM	3019 LM	STAGNA ULTRA 60CM 19W IP66 3019LM 4K SER.
STUL60019XF	6500K	130°	4225 LM	3140 LM	STAGNA ULTRA 60CM 19W IP66 3140LM 6K SER.

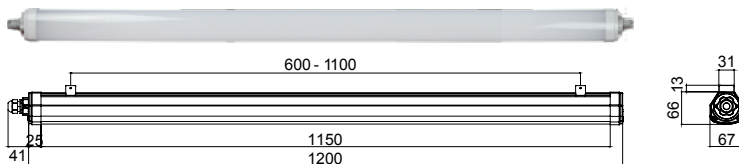

CONSUMPTION	POWER SUPPLY
37W	230V

AVAILABLE PRODUCTS / 120CM


CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL120037TC	3000K	130°	7194 LM	5399 LM	STAGNA ULTRA 120CM 37W IP66 5399LM 3K SER.
STUL120037XN	4000K	130°	7573 LM	5683 LM	STAGNA ULTRA 120CM 37W IP66 5683LM 4K SER.
STUL120037XF	6500K	130°	7952 LM	5967 LM	STAGNA ULTRA 120CM 37W IP66 5967LM 6K SER.

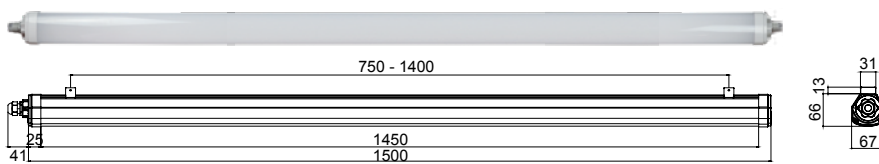

CONSUMPTION	POWER SUPPLY
51W 65W	230V

AVAILABLE PRODUCTS / 150CM

CODE	CCT	BEAM	LUMEN		DESCRIPTION
			NOMIN	OUTPUT TA°=25	
SYMMETRICAL					
STUL150051XC	3000K	130°	9670 LM	7386 LM	STAGNA ULTRA 150CM 51W IP66 7386LM 3K SER.
STUL150051XN	4000K	130°	10179 LM	7775 LM	STAGNA ULTRA 150CM 51W IP66 7775LM 4K SER.
STUL150051XF	6500K	130°	10688 LM	8164 LM	STAGNA ULTRA 150CM 51W IP66 8164LM 6K SER.
STUL150071XC	3000K	130°	11281 LM	9413 LM	STAGNA ULTRA 150CM 71W IP66 9413LM 3K SER.
STUL150071XN	4000K	130°	11875 LM	9909 LM	STAGNA ULTRA 150CM 71W IP66 9909LM 4K SER.
STUL150071XF	6500K	130°	12468 LM	10405 LM	STAGNA ULTRA 150CM 71W IP66 10405LM 6K SER.

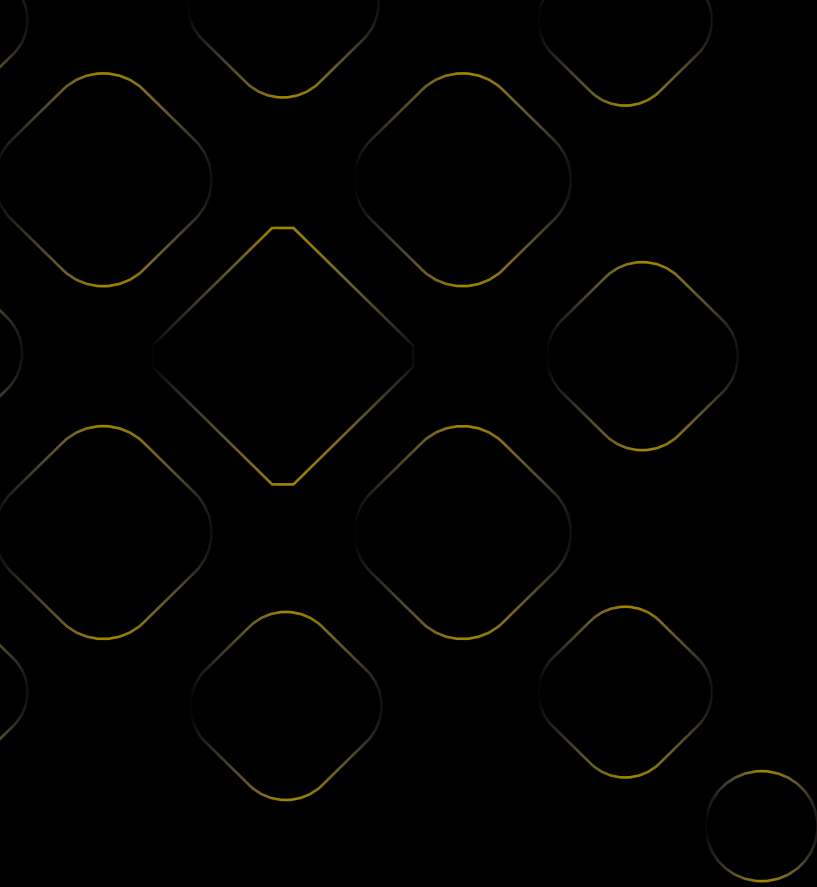

 **PLAYLED**

PLAYLED IS A BRAND OF **INGEGNERIE MECCANICHE ITALIANE S.R.L.**

ITALIAN MANUFACTURERS OF LIGHTING PRODUCTS